




- Frosted PMMA for soft light on the top
- 1m or 1.2 m optional double tubes :  
inside tube PMMA with bubbles+outside tube PC




Decoration Illumination in the garden or landscape path

Aluminium base with driver and LED,  
DC24V / AC100-240V optional

Dimension .....

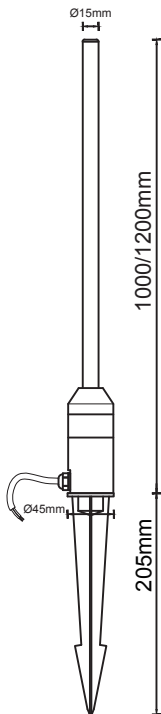

Light Distribution Curve (3000K,3.5W,110°) .....

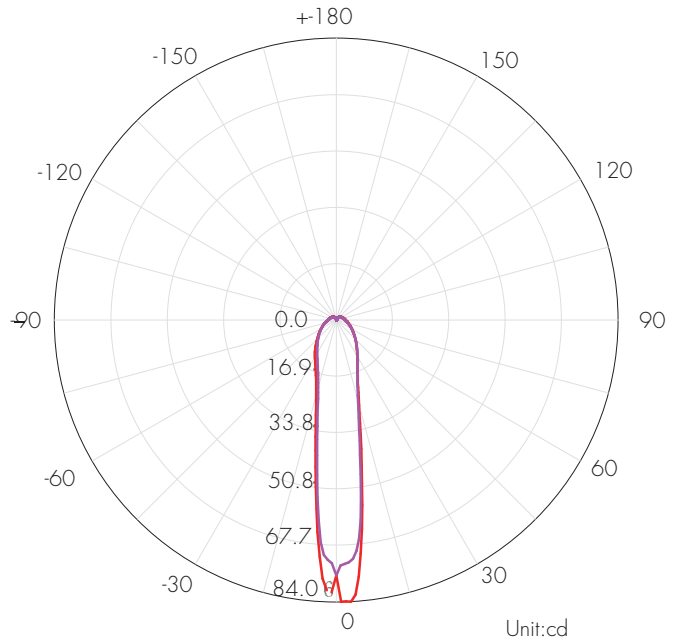

IP65 IK02

3 Years Warranty

Parameter .....

General Data	
Item No.	AC100-265V:IL-1001-0300-CH / DC24V: IL-1001-0300-C
Power	3.5W±10%
LED type	1 PC 3W CREE MHB
Luminous flux	60lm±10%
CCT	2700K,3000K,4000K,6000K
CRI	80+
Beam angle	110°
Dimension	1200 or 1000*15/45 (mm) (Length x Diameter top/Diameter base)
Net weight	0.65 kgs /0.6 kgs
Warranty	3 years
Certifications	CE, RoHS

Electrical Data	
Input voltage	AC100~265V or DC24V
Insulation class	Class I or III
Cable	1PC rubber cable 1M H05RN-F 3 or 2 x 1 mm square
Driver	AC100-265V: with built-in constant current driver for LEDs DC24V: constant low voltage input constant current output for LEDs

Construction Data	
IP rating	IP65 Waterproof
IK rating	IK02
Housing of base	Aluminum
Protection finishing	Anodizing + Powder coated painting in dark grey
Top	frosted PMMA top part,
Body	double tubes : one PMMA tube with bubbles inside +one PC tube outside
Loading capacity	/ kgs
Cable Gland	PG gland
Gasket	silicone glue seal


Spike With Aluminium spike painting in dark grey ,205 mm height

Packaging	
Inner box size	/ mm
Carton size	/ cm ( / PCS / carton)

Features .....


- .Reed lighting which is idea for the decoration illumination in the garden with plants .
- .Frosted PMMA top part with soft light.
- .Double tubes : one PMMA tube with bubbles inside +one PC tube outside
- .1.2m or 1 m pole with base optional.
- .AC100-265V or DC24V.
- .With spike for ground installation.
- . Beautiful appearance
- . Excellent design of heat-conducting housing ensure long life time of LED
- . Aluminum base in double protecting anti-corrosion film : anodizing + powder coated painting in dark grey
- . Waterproof IP65
- . CREE LED with LM80 approval
- . 3 years warranty.
- . Professional sales and technicians to serve you

Installation Drawing .....

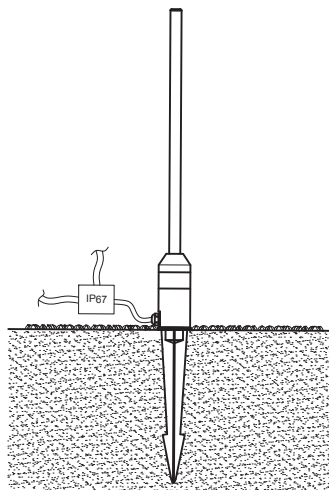

With spike for ground installation

Lux distance Curve ( 3000K,3.5W,110°) .....

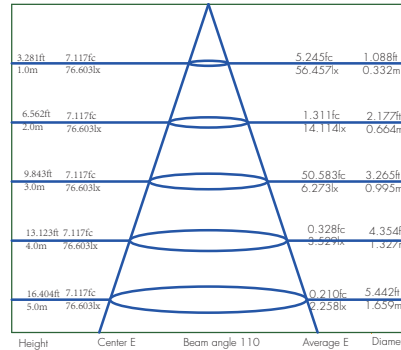

Illumination Picture (110°) .....

