

Shadow series

Asymmetric beam 60°x (optional 15° ,20° ,25° ,30° ,38° ,45° ,60°)

Shadow SS



SS316 trim IP67
Inground light
/ Wall light
5 watts
UGR<2
Super visual comfort


Shadow AL




Aluminium trim IP65
Wall light
3 watts
UGR ≤ 1
Super visual comfort




Dimension

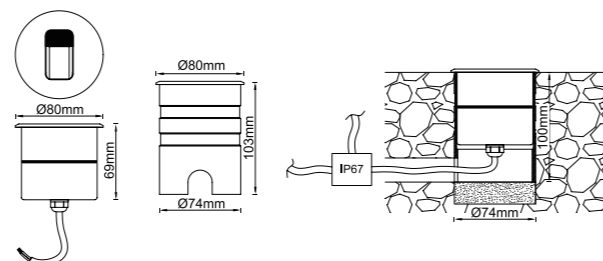


Light Distribution Curve (3000K,60°x30°).....

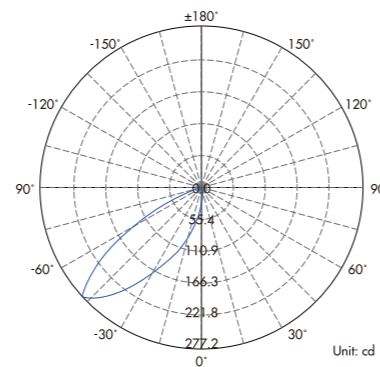

Lux distance Curve (3000K,60°x30°).....

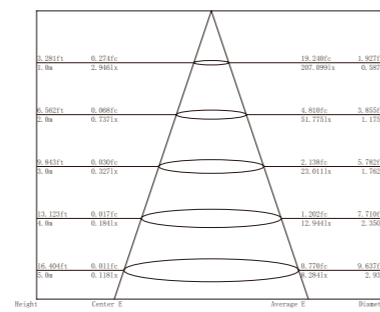

Illumination Picture (60°x30°)

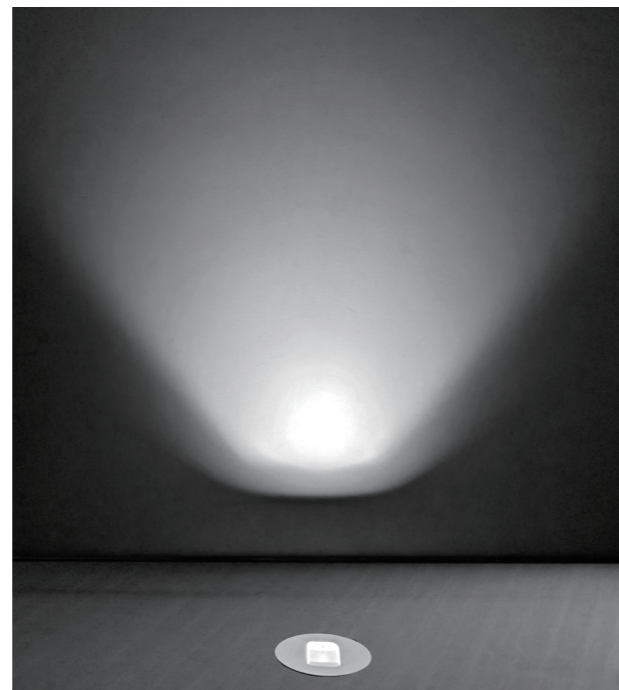

CE RoHS COMPLIANT IP67 IK06

3 Years Warranty

SS316 trim
Used as inground light or wall light


Parameter

General Data	
Item No.	UL-1016-0500-A
Power	5 Watts +10%
LED type	1PC CREE XPG2 LED
Luminous flux	120lm +10%
CCT	2700K, 3000K, 4000K, 4500K, 5700K, 6500K
CRI	80+
Beam angle	Asymmetric 60°x (optional 15°, 20°, 25°, 30°, 38°, 45°, 60°)
Dimension	Ø80*69 mm (Diameter x Height)
Cut out	Ø74
Net weight	0.8 kgs
Warranty	3 years
Certifications	CE, RoHS
Electrical Data	
Input voltage	DC 12-24V (AC 100-265V optional)
Insulation class	Class III
Cable	1 PC rubber cable 1M H05RN-F 2 or 3x1mm square
Driver	low constant voltage input, constant current output for LED
Construction Data	
IP rating	IP67 waterproof
IK rating	IK06
Housing	Aluminium CNC machined
Protection finishing	Anodized dark grey for housing
Trim	Stainless steel 316 trim
Glass	Tempered glass
Loading capacity	/
Cable Gland	PG Gland IP67
Gasket	silicone ring + silicone glue seal
Accessories	
Mounting box	Aluminium mounting sleeve
Packaging	
Inner box size	150*110*85 mm
Carton size	35.5*32.5*28 cm (18PCS/carton)


Shadow AL




Dimension

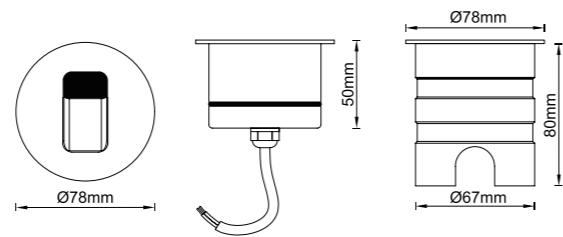

Light Distribution Curve (3000K, 60°x30°)

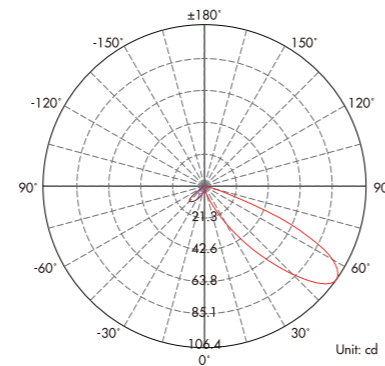

Lux distance Curve (3000K, 60°x30°)

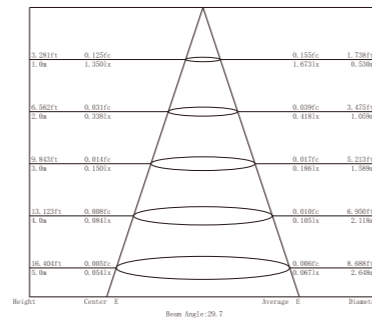

Illumination Picture (60°x30°)



CE **RoHS COMPLIANT** **IP65 IK06**

3 Years Warranty

*IP65 Aluminium trim used as wall light,
IP67 5S316 trim version used as inground light as options*

Parameter	
General Data	
Item No.	SP0160300-A
Power	3 watts +10%
LED type	1 PC CREE XPE LED
Luminous flux	80lm +10%
CCT	2700K, 3000K, 4000K, 4500K, 5700K, 6500K
CRI	80+
Beam angle	Asymmetric 60°x (optional 15°, 20°, 25°, 30°, 38°, 45°, 60°)
Dimension	Ø78*50 mm (Diameter x Height)
Cut out	Ø67mm
Net weight	0.5 kgs
Warranty	3 years
Certifications	CE, RoHS
Electrical Data	
Input voltage	DC12-24V (AC100-265V optional)
Insulation class	Class III
Cable	1 PC rubber cable 1M H05RN-F 2 or 3x1mm square
Driver	low constant voltage input, constant current output for LED
Construction Data	
IP rating	IP65 Waterproof
IK rating	IK06
Housing	Aluminium CNC machined
Protection finishing	Anodized +Powder coated painted in dark grey for housing
Trim	Dark grey Aluminium trim or stainless steel 316 trim as options
Glass	Tempered glass
Loading capacity	/
Cable Gland	PG Gland IP67
Gasket	silicone ring + silicone glue seal
Accessories	
Mounting box	Aluminium mounting sleeve
Packaging	
Inner box size	85*85*110mm
Carton size	45*36.5*13 cm (20PCS/carton)

WALL LIGHTS SERIES

